

AMBIENT COMFORT RANGE HEAT PUMP

MANUFACTURED BY:



The Ambient Comfort range of heat pumps allow more advanced solutions in any domestic environment delivering both hydronic heating and cooling as well as domestic hot water. The Australian made range of AusGeothermal heat pumps are air to water heat pumps using inverter technology, ideal for stand-alone systems or combined with additional heat sources and equipment delivering hybrid systems.



**5 YEAR*
WARRANTY**



AMBIENT COMFORT

- Australian Made
- Vertical discharge fan
- Ideal for heating and cooling application
- BLDC Inverter compressor and EC modulating fan
- Compatible with Standard Thermostats / Modbus / BACnet / SNMP / BMS



HEAT PUMP THERMOSTAT & CONTROLLER



AQUA PLUS BUFFER TANK



MELBOURNE

Head Office & Showroom
11 Fiveways Blvd
Keysborough VIC 3173
P: 1300 001 800

SYDNEY

Showroom & Warehouse
Unit G7, Alexandria Industrial Estate
35-39 Bourke Road, Alexandria NSW 2015
P: 02 7209 6235




enquiries@huntheat.com.au



huntheat.com.au


Technical data		AMBIENT COMFORT 12 SINGLE PHASE	AMBIENT COMFORT 12 3 PHASE	AMBIENT COMFORT 23 SINGLE PHASE	AMBIENT COMFORT 23 3 PHASE
Power Supply	V-ph-Hz	240 - 1 - 50	415 - 3 - 50	240 - 1 - 50	415 - 3 - 50
Heating Output (Nominal)	kW	12		21	
COP (A7/W35)		3.45		3.8	
Cooling Output (Nominal)	kW	10.5		18	
EER (A35/W18)		2.76		3.36	
Working Range - Heating	°C	-5 - 45			
Maximum Water Temperature	°C	60			
Refrigerant Gas		R410a @ 4.8kG		R410a @ 5.6kG	
Maximum Water Pressure	kPa	300			
Maximum Power Absorbed	kW	4.9		6.7	
Maximum Current Absorbed	Amps	20.4	11.8	27.9	16.2
Minimum Breaker Size	Amps	32	16	40	20
Expansion Vessel Volume	L	8			
Air Flow Rate	m3/h	4500		8000	
Sound Power Level	dB(A)	55		58	
Weight	kg	135		170	

AMBIENT COMFORT 12

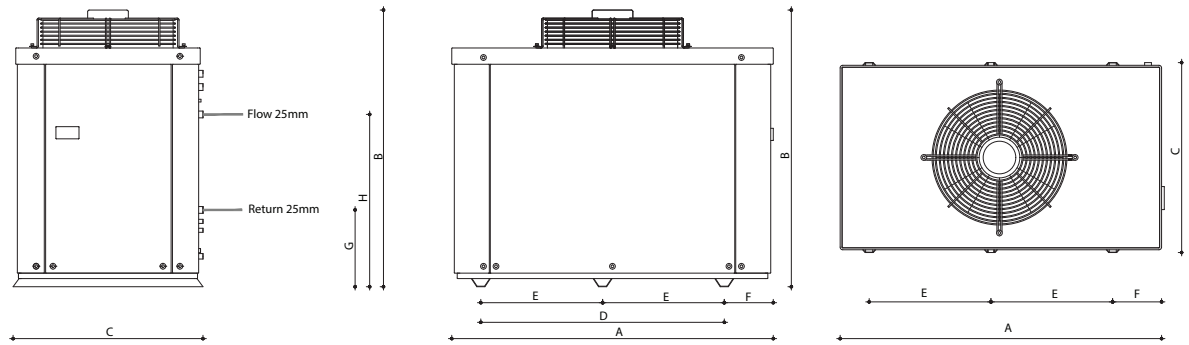

A	B	C	D	E	F	G	H
1185 mm	1020 mm	700 mm	898 mm	449 mm	180 mm	283 mm	635 mm

AMBIENT COMFORT 23

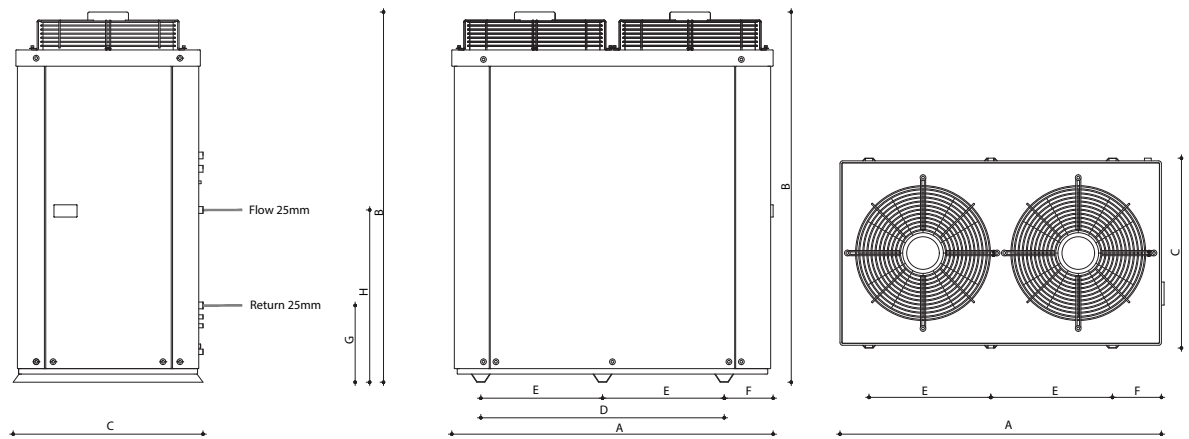

A	B	C	D	E	F	G	H
1185 mm	1365 mm	700 mm	898 mm	449 mm	180 mm	283 mm	635 mm