

Data Sheet: VLR 70 S



› VLR 70 S Trend



- › Up to 92% heat recovery
- › Decentralised ventilation – easy installation for new or existing buildings
- › Supplies fresh air from outside into your home or office
- › Prevents the growth of mould with improved air ventilation
- › Hygienic aluminium heat exchanger
- › Quiet operation
- › Installed in pairs, connect up to 8 units together



VLR 70 S

DECENTRALISED VENTILATION WITH HEAT RECOVERY

Create a pleasant indoor environment in the home with the VLR 70 S decentralised heat recovery ventilation. Installed in pairs with ducting through the walls, the VLR 70 S has a heat recovery level of up to 92%.

		TREND
Model		VLR 70 S
		200002
Air flow rate	m ³ /h	10 - 70
Heat recovery level		Up to 92 %
Filter class		F7 / G2
Max. power consumption (8 units)	W	92
Connection		1/N 100-240 V 50/60 Hz
Max. current (8 units)	A	3.8
Sound power level at 20 m ³ /h	dB(A)	35
IP rating		IP 21
Maximum altitude for installation	m	2000
Operating temperature range	°C	-14 to +40
Wall thickness	mm	100 - 300
Min. outlet aperture	mm	∅200 square 185 x 185
Height	mm	285
Width	mm	360
Depth	mm	590
Weight	kg	5.2




VLR 70 S



Wall mounted controller

VLR 70 S Dimensions

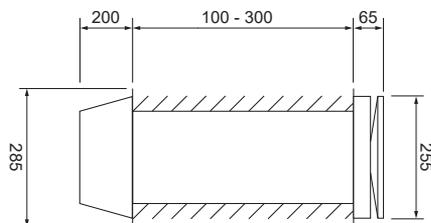

STIEBEL ELTRON is committed to our policy of continual improvement, some features may have subsequently been changed or even removed. Our advisors will be happy to consult with you regarding the currently applicable equipment features. The images used in this data sheet are for reference only.